


PAS-CAB015 | 1.5 SQ MM 2 Core Speaker Cable

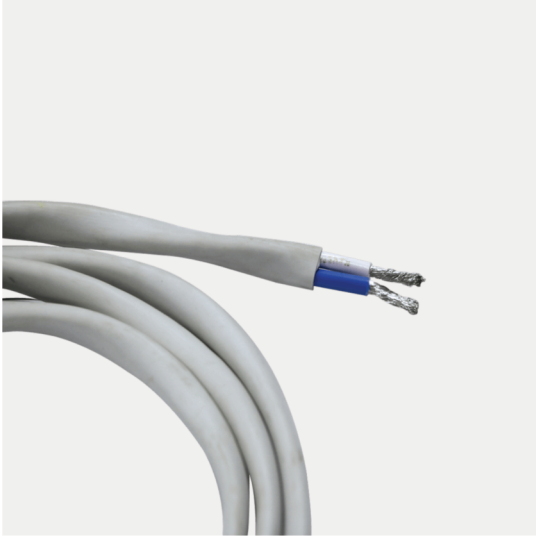

Key features

- High-Quality Transmission: Delivers clear and accurate audio signals.
- Flexible Design: Easy to handle and install in various settings.
- Tinned Conductors: Enhances conductivity and resists corrosion.
- Twisted Pair Configuration: Minimizes crosstalk and signal interference.
- Versatile Applications: Suitable for indoor use in schools, auditoriums, and public spaces.
- Convenient Lengths: Available in various coil lengths to fit different installation needs.

Product Overview

The Macsys PAS-CAB015 speaker cable is engineered for superior audio performance and reliability. It features high-quality tinned copper conductors to ensure excellent conductivity and resistance to oxidation. The cable's design includes twisted pairs to minimize interference and maintain clear signal transmission. With a rugged yet flexible construction, it is suitable for both professional and home audio systems. Available in various lengths, the PAS-CAB015 provides a versatile solution for connecting speakers in various environments.

Technical Specification

Featuess	Detail
Product Category	Speaker Cable
Conductors	Bare Copper, Aluminium Tinned Multi-Thread Copper
Conductor Type	1.5 Sq mm Twisted Pair Cable, Identical color code for secure connection
Core	2 Core
Cable Type	Oxygen-Free Type Cable
Jacket Material	Flexible virgin PVC for long-lasting durability
Temperature Rating	75°C
Insulation Resistance	DC-500V 10MΩ/km Minimum at 20°C
Conductor Resistance	13.7Ω/km Maximum at 20°C
Lengths Available	100, 200, 500 meters (Custom lengths available upon request)
Additional Features	Smooth flexible jacket with sequential numbering for easy length measurement and tracking



for more detail reach us @ www.macsystemtech.com | write us on : contact@macsys.com

©2024 Macsys

Macsys reserve rights to introduce modifications without notice. Product images are for illustrative purposes only, the actual product may vary. Warranty policy applies as described on our website.

