


PAS-NACP | Network Audio Control Touch Panle

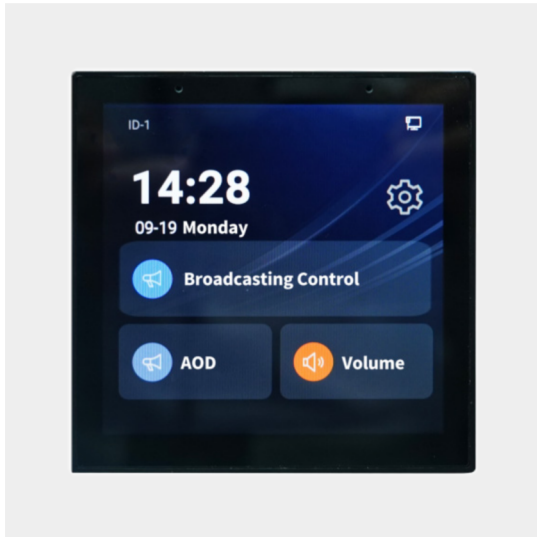

Key features

- 4-inch capacitive touchscreen for intuitive broadcast control.
- Remote task broadcasting with real-time volume adjustment.
- Manual AOD task triggering and access to AOD Mp3 files from PAS-NA1000 media center.
- Compact installation in 86-type wall box with black plastic housing.

Product Overview

The Macsys PAS-NACP is a sleek Network Audio Control Touch Panel designed for 86-type wall box installations. Featuring a 4-inch capacitive color touchscreen (480×480 resolution), it provides intuitive access to broadcasting, on-demand media, and real-time volume control of individual devices.

Seamlessly integrated with PAS-NA1000 server, the PAS-NACP supports remote task broadcasting, manual AOD triggering, and media playback from the server's media center.

With Ethernet RJ45 connectivity (TCP/IP, UDP, ARP, ICMP, IGMP), it supports cross-segment and cross-router networking. The device offers flexible configuration via web interface or on-device settings, operates on AC100–240V, and is built in a compact 86×86×37.5mm black plastic housing for dry indoor use.

Technical Specification

Feature	Details
Type	Network Wall Mount Audio Touch Panel
Installation Format	86-type wall box
Screen Type	4-inch capacitive color touchscreen
Resolution	480 × 480
Network Interface	10BASE-T/100BASE-TX RJ45
Supported Protocols	TCP/IP, UDP, ARP, ICMP, IGMP
Ethernet Compatibility	Cross-segment and cross-router support
Remote Broadcast Control	Task broadcasting with real-time volume adjustment
Manual AOD Trigger	On-demand playback and manual AOD task triggering
Media Access	Access AOD Mp3 files from PAS-NA1000 media center
Configuration	Web interface or on-device settings
Power Supply	AC100–240V, 50/60Hz
Power Terminals	N (Neutral), L (Live input), L1 (Live output), L2 (Live output)
Operating Temperature	0°C ~ +40°C
Operating Humidity	5%–90% RH (non-condensing)
Installation Environment	Dry indoor locations only
Housing Material	Plastic
Color	Black
Dimensions	86 × 86 × 37.5 mm
Weight	0.21 kg
Accessories Included	Quick Installation Guide, Terminal (3.81–2P)
Certification	CE, RoHS Compliance

Dimension

